

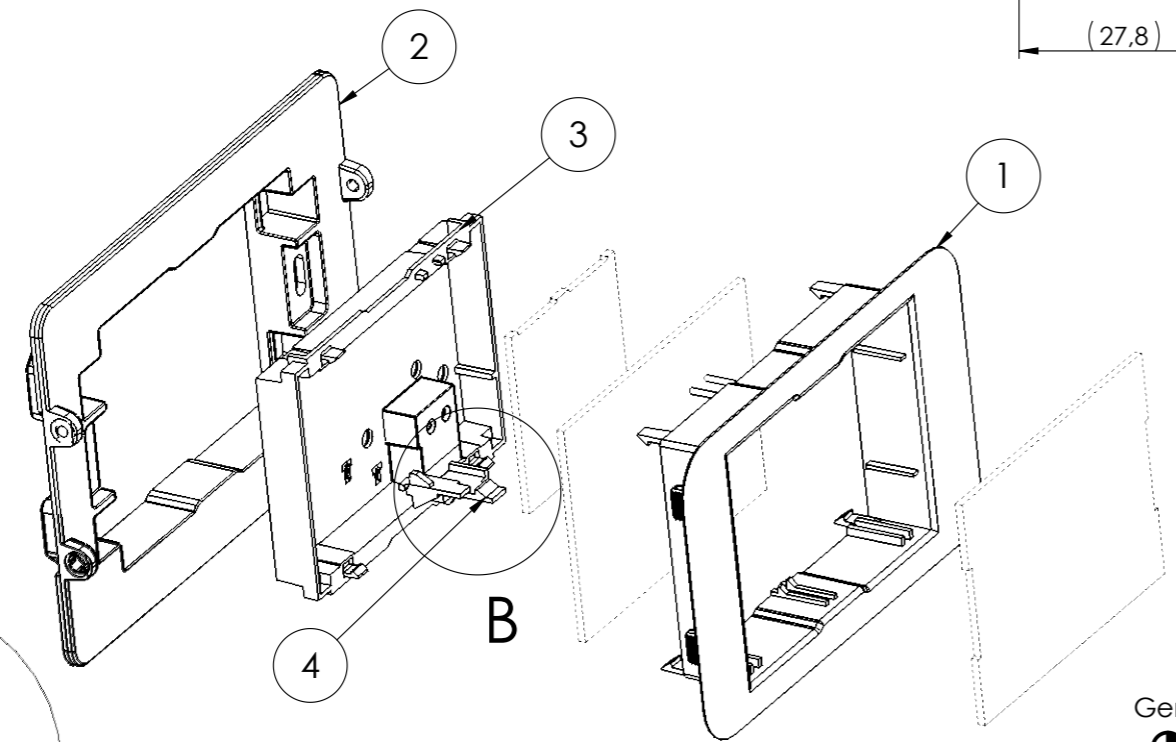
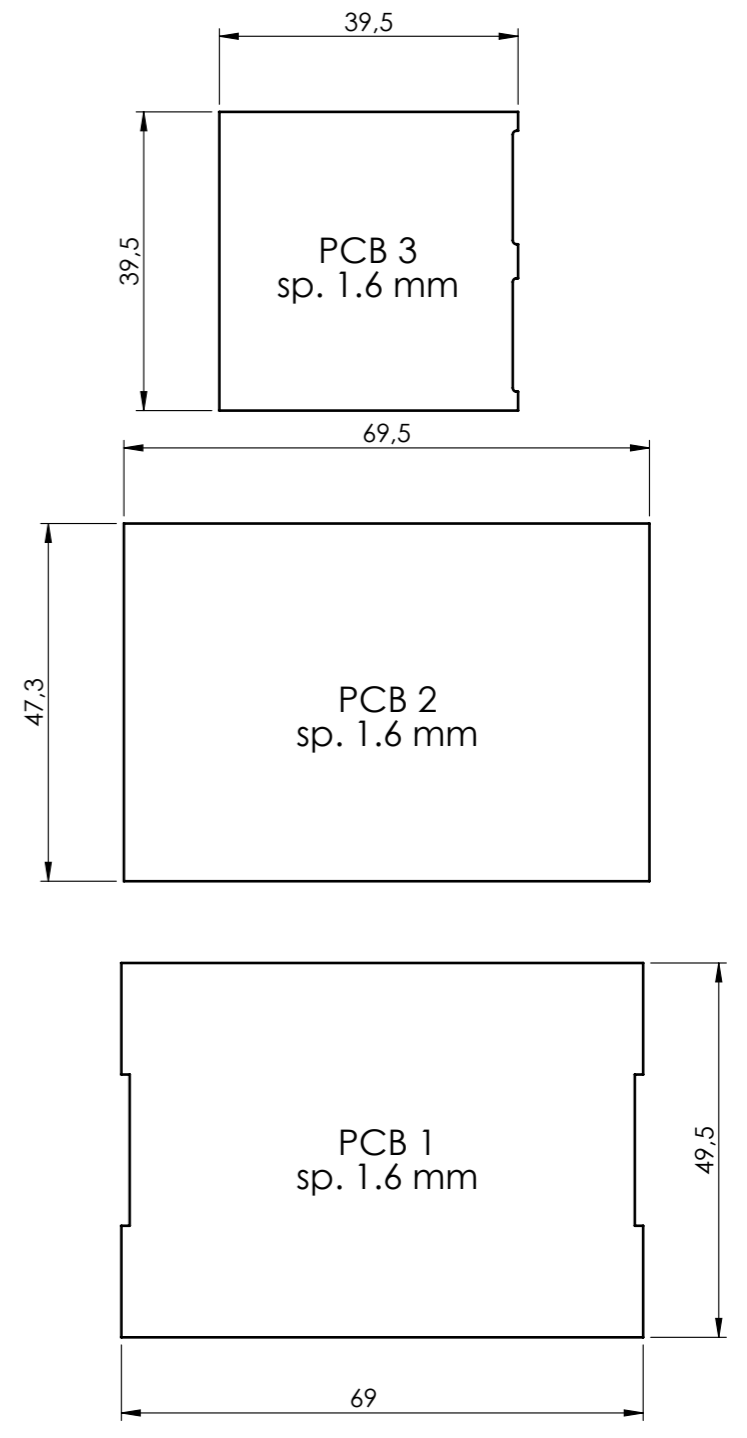
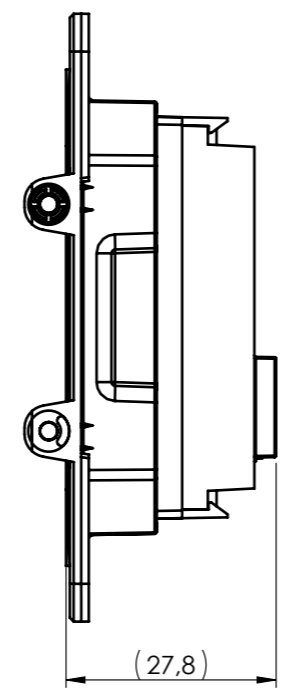


SECTION A-A

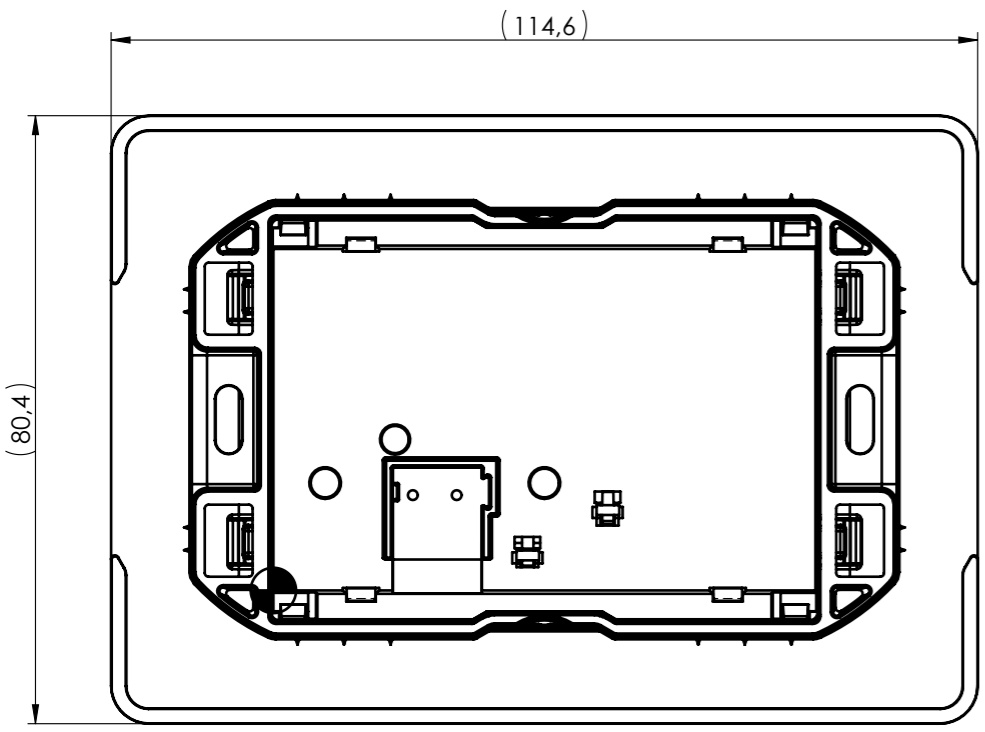

DETAIL B
SCALE 2 : 1.5



To use PCB3, assemble the hook

General information:
 - Workpiece zero point for mechanical processing
 - Minimum recommended radius for machining = R1.0 mm

RIF.	Q.TY	DRAWING	DESCRIPTION
1	1	2_020_00008	ENCLOSURE FOR 503 H20/KNX
2	1	2_010_00002	ITOUCH BACK FRAME 80X120 FOR BOX 503
3	1	2_020_00009	REAR CLOSURE WITH HOOKS 503 KNX
4	1	2_020_00010	REMOVABLE HOOK FOR REAR LOCKING 503 H20 KNX

General Tolerance UNI EN 22768/1 Media (m)					Sheet:
from 0.5 to 3 ± 0.1	from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	1
Scale: 1:1	Drawn: R.N.	Checked: R.N.	Date: 01/03/2023	Material:	Process:
Dimension in mm	The present drawing cannot be reproduced or communicated to 3rd parties, even partially, without the authorization of ITALTRONIC S.p.A. Italtronic reserves to protect its own rights according to the law.			Weight: gr	Cod. Mold: --

italtronic
enclosures for electronics
italtronic.com

Description:
KIT PLACCA POSTERIORE PER SCATOLA 503 H20 KNX
REAR PLATE KIT FOR 503 H20 KNX BOX

Drawing nr.: **3_010_00006**

Rev.: 00 A3